


Configuring TP-Link MR-3020

If reconfiguring device start at step 1.

If configuring for the first time, plug in device and skip to step 2.

1. Push the reset button on front of device for 15 seconds


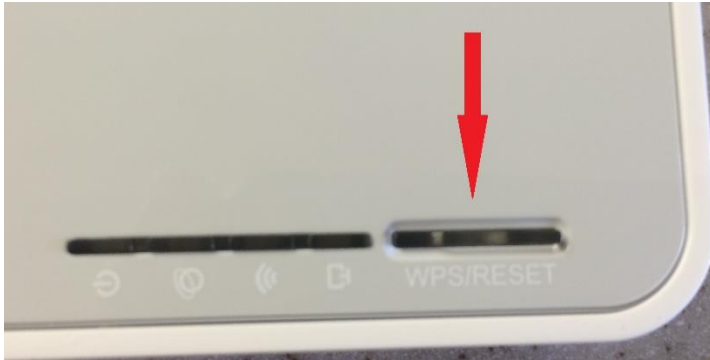


2. Make sure device is set to WISP.




3. On your laptop or smart phone connect to the device using the SSID and password written on the back or side.
4. After connecting to device, input 192.168.0.254 in the address field end press enter.


5. Enter the word *admin* (lowercase) for both the username and password and click Login.

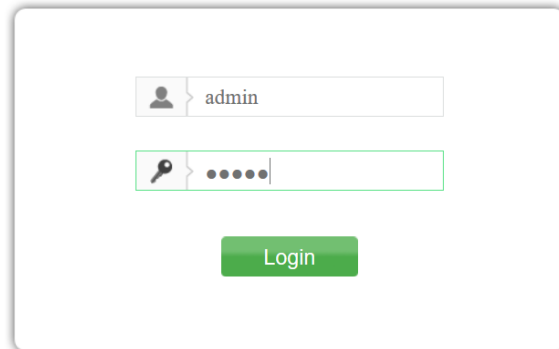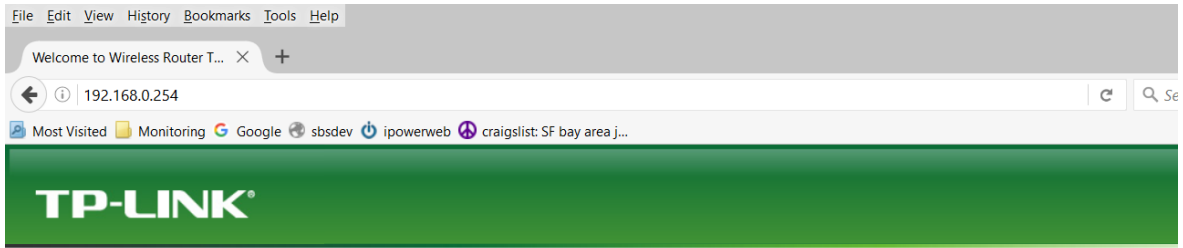

6. Click Next to run the Quick Setup.

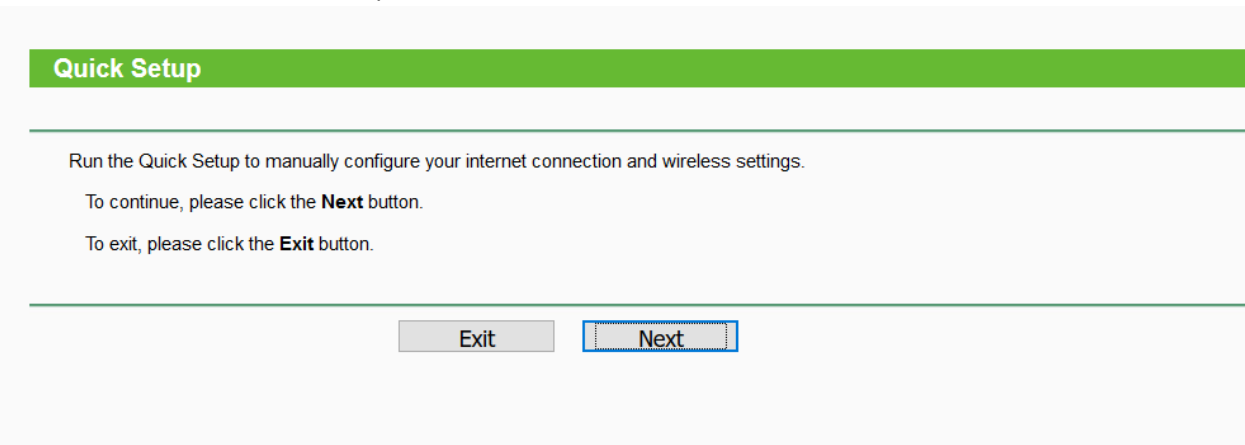

7. Choose Dynamic IP and click Next.

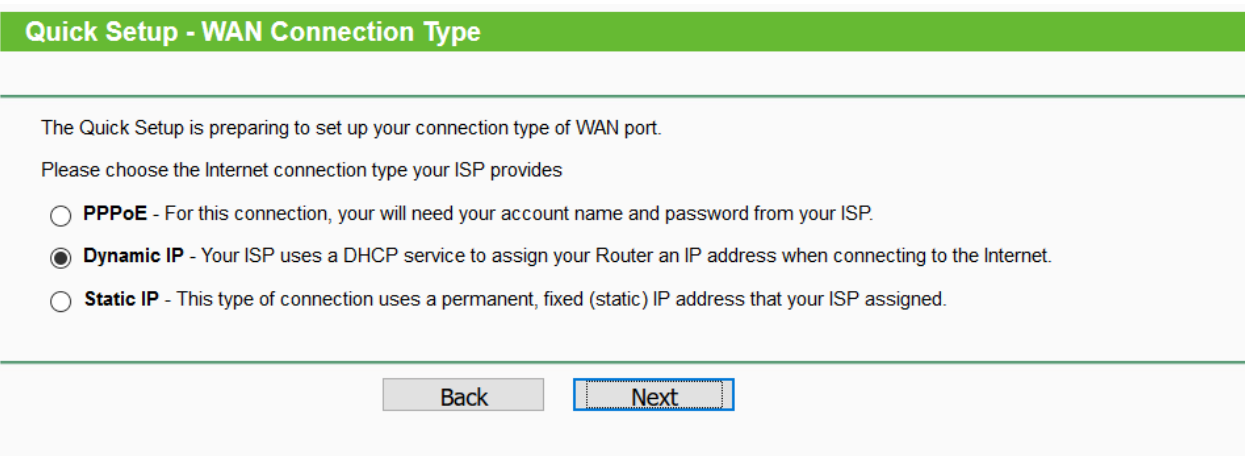

8. Choose No clone address and click Next.

Quick Setup - MAC Clone

MAC(Media Access Control) address is a unique identifier that identifies your computer or device in the network. Some of the ISPs may register the MAC address of your computer which firstly connects to their services, and would not allow the Internet connection for any new computer or router. TP-LINK router can help you to "clone" or replicate the registered MAC address of your first computer.

In most of the cases, there is no need to clone the MAC address. But if you can't get the Internet connection after Quick Setup, please run it again and clone the MAC address for a try.

No, I do NOT need to clone MAC address.
 YES, I need to clone MAC address.

Note: please make sure your current computer is the one initially connected to your modem or ISP's device.

9. Click Survey to find a list of visible wifi networks. Click Next.

Quick Setup - Wireless

Client Setting

SSID:

BSSID: Example:00-1D-0F-11-22-33

Key type:

WEP Index:

Auth type:

Password:

AP Setting

Local SSID:

10. Select the target wireless network and click Connect. Enter the password and Key type (probably WPA/WPA2) and click Next.

11. Click Reboot for the configuration to take place.

Quick Setup - Finish

Congratulations! The Device is now connecting you to the Internet. For detail settings, please click other menus if necessary.

The change of wireless config will not take effect until the Device reboot.

Back

Reboot

12. You are done! Make sure an Ethernet cable is connected solidly from the MR-3020 to the monitor.